




- Common Mode Filter Choke for Telecom Application
- Designed for 4-Wire Links, such as ISDN-S/T and T1/E1/CEPT
- High Frequency Chokes for EMI Reduction
- 500 Vrms Hipot


Electrical Parameters @ 25° C

OCL (μ H Min.)	Interwinding Capacitance (pF Max.)	Leakage Inductance (μ H Max.)	DCR (Ω Max.)
22.5	17	0.23	0.30


Typical Impedance

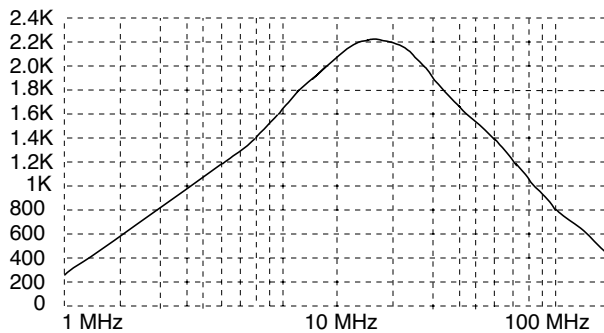


Typical Common Mode Attenuation

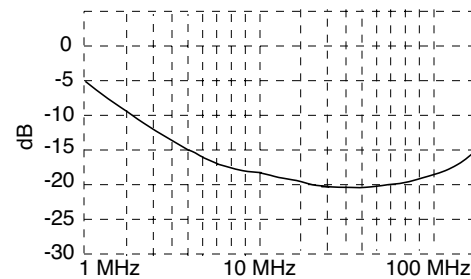

Package

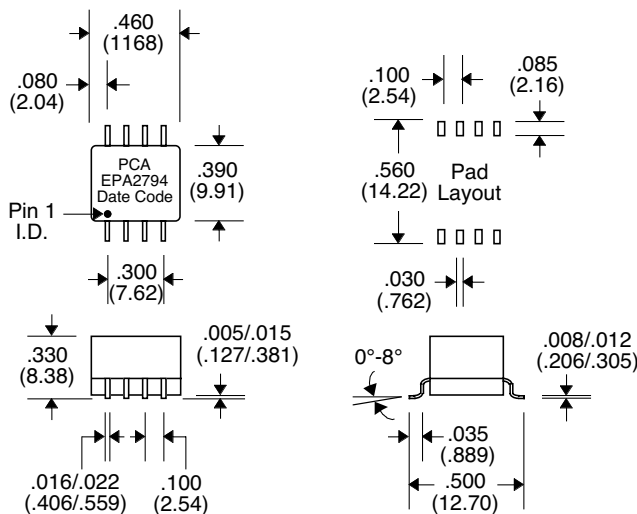

Schematic



Unless Otherwise Specified Dimensions are in Inches /mm ±.010 /.25