


- Common Mode Choke for EMI Reduction
- Robust Construction to meet tough reflow process
- Rated Current : 500 mA
- 1500 Vrms Isolation


Electrical Parameters @ 25° C

| Primary Inductance (μ H Min.) | Leakage Inductance (μ H Max.) | DCR (Ω Max.) |
|---------------------------------------|---------------------------------------|-------------------------|
| @ 100 KHz, 0.1 Vrms | @ 100 KHz, 0.1 Vrms | |
| 35 | .03 | 0.75 |

Schematic



Package

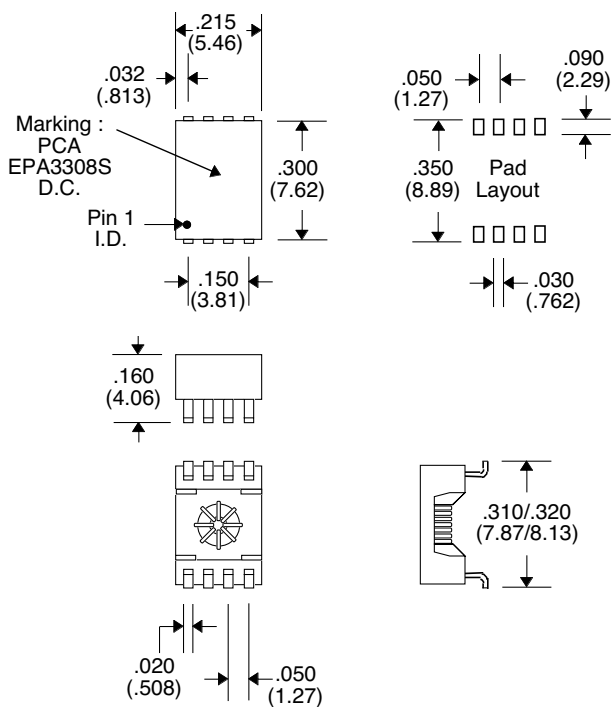

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$