




- Common Mode Choke for EMI Reduction
- Add "-RC" after part number for RoHS Compliant


Electrical Parameters @ 25° C

OCL ($\mu\text{H Min.}$)	Interwinding Capacitance (pF Max.)	Leakage Inductance ($\mu\text{H Max.}$)	DCR (Max.)
36	15	0.3	0.4

Package

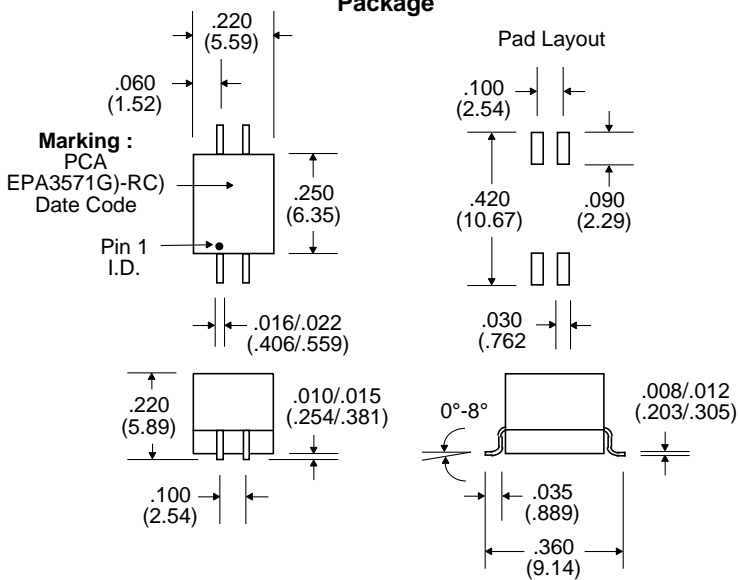


Typical Common Mode Impedance ()

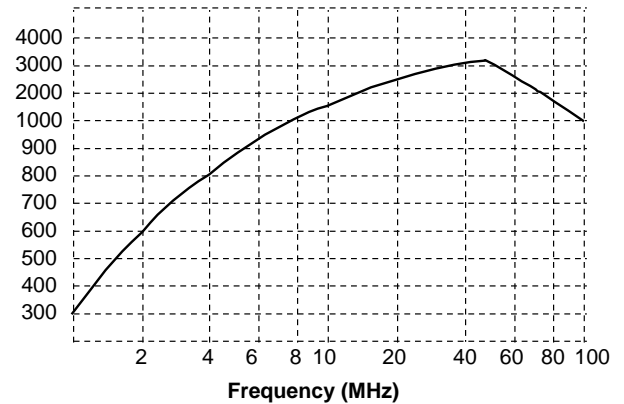

Notes :	EPA3571G	EPA3571G-RC
1. Lead Finish	SnPb	Hot Tin Dip (Sn) †
2. Peak Temperature Rating	225°C	250°C
3. Moisture Sensitive Levels	MSL = 3 (168 Hours, 30°C/60%RH)	MSL = 4 (72 Hours, 30°C/60%RH)
4. Weight	0.4528 grams	0.4528 grams
5. Packaging Information	(Tube)	90 pieces/tube
	(Tape & Reel)	1000 pieces/13" reel
		90 pieces/tube
		1000 pieces/13" reel

† Lead Material : Ni Barrier over Cu

Schematic



Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25