


- High Frequency Chokes for EMI Reduction
- 10 A Continuous Maximum Current
- 40°C Maximum Temperature Rise


Electrical Parameters @ 25° C

Impedance (Ω Typ.)			Hipot (Vrms)	DCR (Ω Max.)
@ 100 KHz	@ 500 KHz	@ 16 Hz		
130	270	230	250	.003


Schematic



Impedance Characteristic

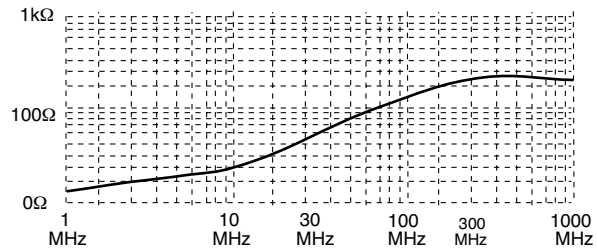

Package

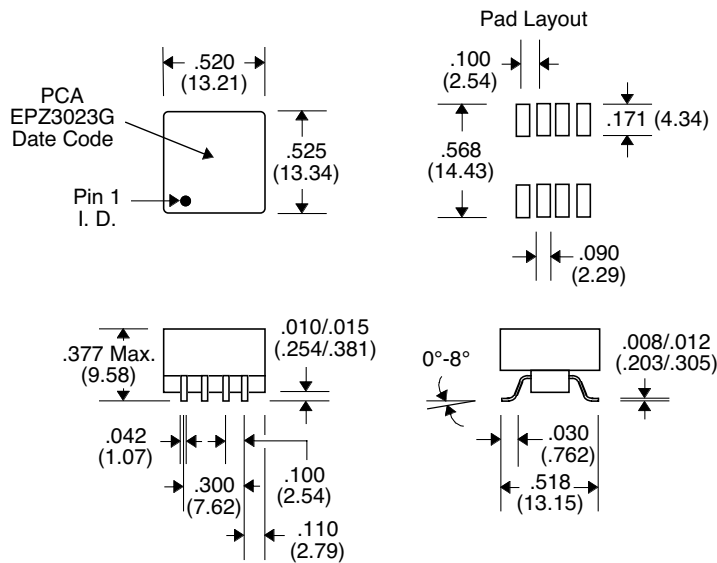

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$