

14 Pin DIP 5 Tap Low Profile TTL Compatible Active Delay Lines EP82XX-HL & EP82XX-HL-RC


Add "-RC" after part number for RoHS Compliant

PCA Part Number	Tap Delays ($\pm 5\%$ or $\pm 2nS$)	Total Delay ($\pm 5\%$ or $\pm 2nS$)	PCA Part Number	Tap Delays ($\pm 5\%$ or $\pm 2nS$)	Total Delay ($\pm 5\%$ or $\pm 2nS$)
EP8200-HL(-RC)	5, 10, 15, 20	25	EP8204-HL(-RC)	40, 80, 120, 160	200
EP8213-HL(-RC)	6, 12, 18, 24	30	EP8221-HL(-RC)	45, 90, 135, 180	225
EP8214-HL(-RC)	7, 14, 21, 28	35	EP8205-HL(-RC)	50, 100, 150, 200	250
EP8215-HL(-RC)	8, 16, 24, 32	40	EP8206-HL(-RC)	60, 120, 180, 240	300
EP8216-HL(-RC)	9, 18, 27, 36	45	EP8207-HL(-RC)	70, 140, 210, 280	350
EP8201-HL(-RC)	10, 20, 30, 40	50	EP8208-HL(-RC)	80, 160, 240, 320	400
EP8211-HL(-RC)	12, 24, 36, 48	60	EP8218-HL(-RC)	84, 168, 252, 336	420
EP8217-HL(-RC)	15, 30, 45, 60	75	EP8222-HL(-RC)	88, 176, 264, 352	440
EP8202-HL(-RC)	20, 40, 60, 80	100	EP8209-HL(-RC)	90, 180, 270, 360	450
EP8219-HL(-RC)	25, 50, 75, 100	125	EP8223-HL(-RC)	94, 188, 282, 376	470
EP8203-HL(-RC)	30, 60, 90, 120	150	EP8210-HL(-RC)	100, 200, 300, 400	500
EP8220-HL(-RC)	35, 70, 105, 140	175			


† Whichever is greater. Delay times referenced from input to leading and trailing edges at 25°C, 5.0V, with no load.

DC Electrical Characteristics		Test Conditions	Min.	Max.	Unit
Parameter					
V _{OH}	High-Level Output Voltage	V _{CC} = min. V _{IL} = max. I _{OH} = max	2.7		V
V _{OL}	Low-Level Output Voltage	V _{CC} = min. V _{IH} = min. I _{OL} = max		0.5	V
V _{IK}	Input Clamp Voltage	V _{CC} = min. I _I = I _{IK}		-1.2	V
I _{IH}	High-Level Input Current	V _{CC} = max. V _{IN} = 2.7V		50	µA
		V _{CC} = max. V _{IN} = 5.25V		1.0	mA
I _{IL}	Low-Level Input Current	V _{CC} = max. V _{IN} = 0.5V		-2	mA
I _{OS}	Short Circuit Output Current	V _{CC} = max. V _{OUT} = 0.	-40	-100	mA
		(One output at a time)			
I _{CCH}	High-Level Supply Current	V _{CC} = max. V _{IN} = OPEN		75	mA
I _{CCL}	Low-Level Supply Current	V _{CC} = max. V _{IN} = 0		75	mA
T _{RO}	Output Rise Time	T _d 500 nS (0.75 to 2.4 Volts)		4	nS
		T _d > 500 nS		5	nS
N _H	Fanout High-Level Output	V _{CC} = max. V _{OH} = 2.7V		20 TTL Load	
N _L	Fanout Low-Level Output	V _{CC} = max. V _{OL} = 0.5V		10 TTL Load	

Schematic

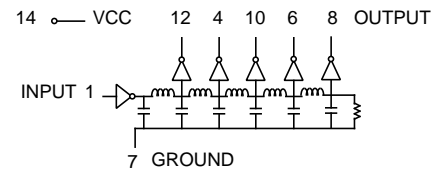

Package

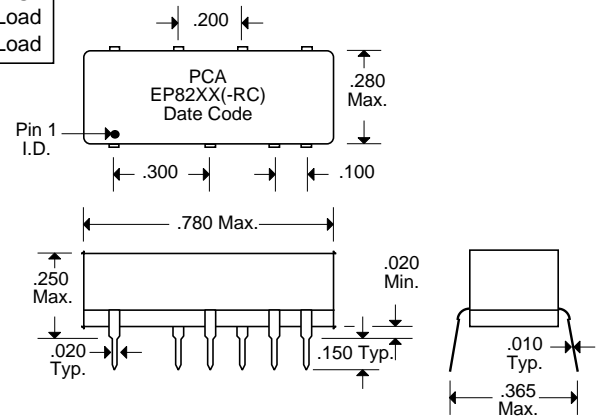

Recommended Operating Conditions		Min.	Max.	Unit
V _{CC}	Supply Voltage	4.75	5.25	V
V _{IH}	High-Level Input Voltage	2.0		V
V _{IL}	Low-Level Input Voltage		0.8	V
I _{IK}	Input Clamp Current		-18	mA
I _{OH}	High-Level Output Current		-1.0	mA
I _{OL}	Low-Level Output Current		20	mA
P _W *	Pulse Width of Total Delay	40		%
d*	Duty Cycle		40	%
T _A	Operating Free-Air Temperature	0	+70	°C

*These two values are inter-dependent.

Input Pulse Test Conditions @ 25° C			Unit
E _{IN}	Pulse Input Voltage	3.2	Volts
P _W	Pulse Width % of Total Delay	110	%
T _{RI}	Pulse Rise Time (0.75 - 2.4 Volts)	2.0	nS
P _{RR}	Pulse Repetition Rate @ T _d 200 nS	1.0	MHz
	Pulse Repetition Rate @ T _d > 200 nS	100	KHz
V _{CC}	Supply Voltage	5.0	Volts

Notes :	EP82XX-HL	EP82XX-HL-RC
1. Lead Finish	SnPb	Hot Tin Dip (Sn)
2. Peak Solder Rating (Wave Solder Process Only)	260°C	260°C
3. Weight	1.5 grams	1.5 grams
4. Packaging Information	(Tube) 27 pieces/tube	27 pieces/tube

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 / .25