


- Operating Temperature : -40°C to +85°C
- Storage Temperature : -40°C to +130°C
- Operating Frequency : 50 KHz and Up
- Lead-Free


### Electrical Parameters @ 25° C

Primary Inductance ( $\mu$ H Min.)	Leakage Inductance ( $\mu$ H Max.)	ET (V $\mu$ Sec. Max.)	Pri.-Sec. Insulation (Vdc)	DCR ( Max.)	
				Pri.	Sec.
785	0.46	9.7	1500	0.60	0.60

### Package

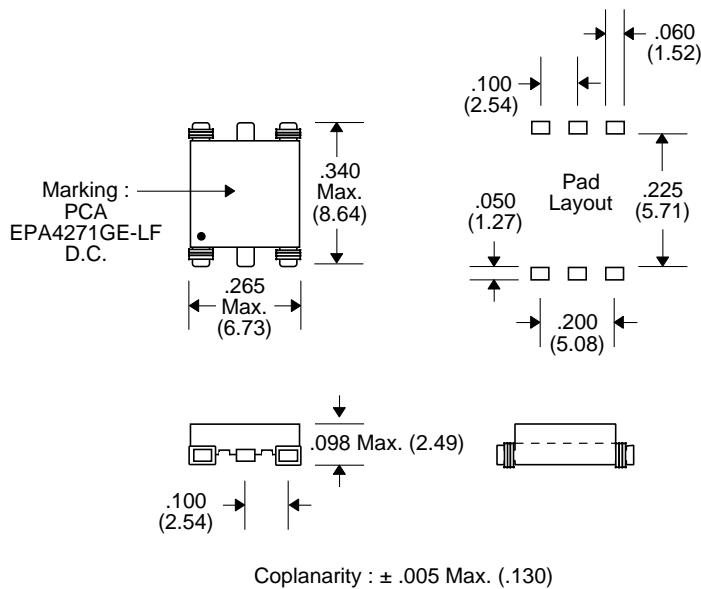

### Schematic



Notes :	EPA4271GE-LF
1. Lead Finish	Hot Dipped Sn or SnCu
2. Peak Temperature Rating	250°C
3. Moisture Sensitive Levels	MSL = 1 (Unlimited, 30°C/60%RH)
4. Weight	0.28 grams
5. Packaging Information	(Tube) 60 pieces/tube
	(Tape & Reel) 1500 pieces/13" reel

Unless Otherwise Specified Dimensions are in Inches /mm  $\pm$  .010 / .25