






- UL 94V-0 Recognized Materials
- UL 1446 Class F Insulation System
- Storage Temperature : -40°C to +125°C
- Operating Temperature : -40°C to +125°C

### Electrical Parameters @ 25°C

Inductance ( $\mu\text{H} \pm 10\%$ )	Leakage Inductance ( $\mu\text{H Max.}$ )	DCR			Turns Ratio	Dielectric Rating (Vrms)
@ 100KHz, 1.0Vrms	@ 100KHz, 1.0Vrms	(m $\Omega$ Max.)				
253	7.5	420	115	7.5	1 : 0.083 : 0.208	1500
Pri.	Pri with all other wdgs shorted	Pri.	Aux.	Sec.	Pri : Sec : Aux.	Pri. - Sec.

### Package

### Schematic

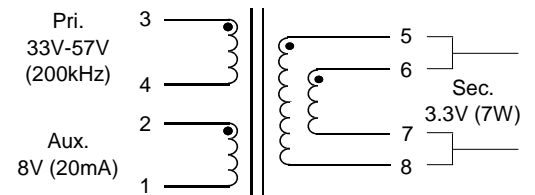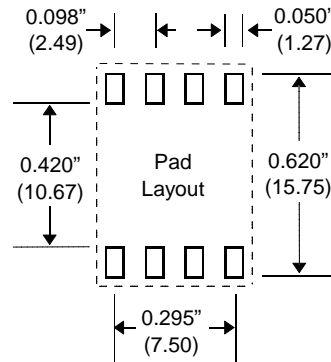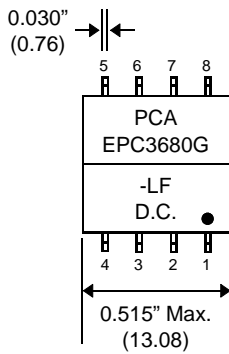

Notes :	EPC3680G-LF
1. Lead Finish	Hot Tin Dip Sn or SnCu
2. Peak Solder Rating	260°C
3. Weight	TBD grams
4. Packaging Information	Tape & Reel : TBD pcs / 13" Reel

Unless Otherwise Specified Dimensions are in Inches /mm  $\pm .010 / .25$