






- UL 94V-0 Recognized Materials
- UL 1446 Class F Insulation System
- Storage Temperature : -40°C to +125°C
- Operating Temperature : -40°C to +125°C

Electrical Parameters @ 25°C

Primary ($\mu\text{H} \pm 10\%$)	Leakage Inductance ($\mu\text{H Max.}$)	DCR			Turns Ratio	Dielectric (Vrms)
@ 100KHz, 1.0Vrms	@ 100KHz, 1.0Vrms	(m Ω Max.)				
127	7.5	440	88	6	1 : 0.083 : 0.208	1500
Pri.	Pri. w/ all other wdgs shorted	Pri.	Aux.	Sec.	Pri. : Sec. : Aux.	Pri. - Sec.

Package

Schematic

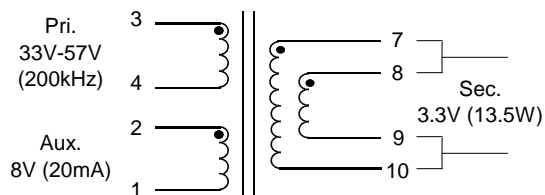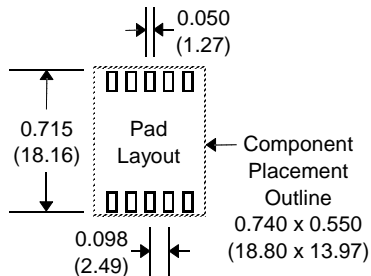

Notes :	EPC3681G-LF
1. Lead Finish	Hot Dipped Sn or SnCu
2. Peak Solder Rating	260°C
3. Weight	TBD grams
4. Packaging Information	Tape & Reel : 200 pieces/13" reel

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$