

Common Mode Choke

EPZ3110-LF




- Use in high quality filter applications
- UL1446 Class B Insulating System
- UL94V-0 Recognized Materials
- RoHS Compliant


Electrical Specification @ 25° C

Inductance (μH +30%/-35%)	Rated (Arms or Adc)	DCR (m Max.)	Leakage Inductance (μH Min.)	Hi-pot (Vrms)	Turns Ratio
1125	1.8	55	3	1500	1:1 \pm 2%


Package

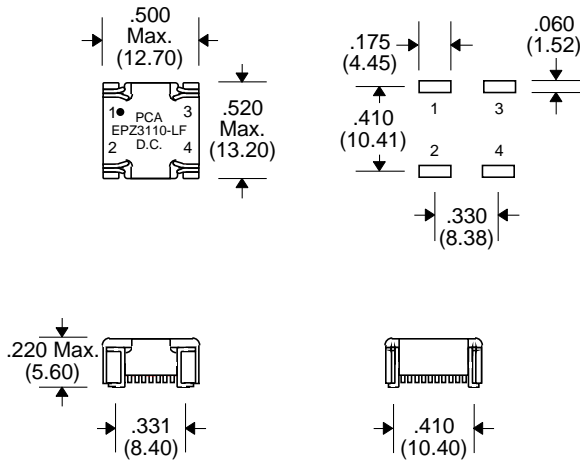

Schematic



Impedance Plot

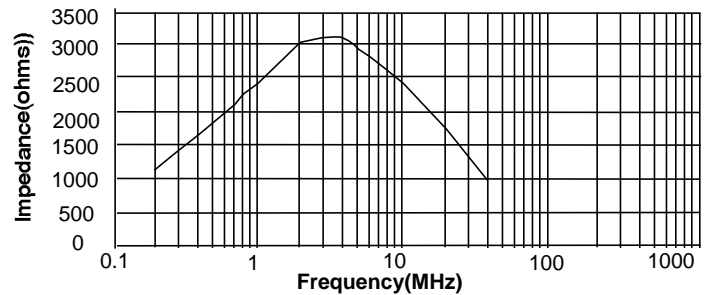

Notes :	EPZ3110-LF
1. Lead Finish	Hot Tin Dip (Sn)
2. Peak Temperature Rating	245°C
3. Moisture Sensitive Levels	MSL = 1
4. Weight	2.38grams
5. Packaging Information	(Tape & Reel) 500 pieces/reel

Unless Otherwise Specified Dimensions are in Inches /mm \pm .010 / .25