

Dims up to 60 watts (4.2 Amps) of incandescent, halogen, or LED lighting reducing heat and power drain on batteries.

For new custom installations or to replace an existing on/off switch in an RV lamp fixture to create low-light ambiance.

Perfect for RVs, trailers, boats, cars, trucks, or anywhere 12 volt DC power is present. Fits in small spaces where other dimmers can't.

Included with the dimmer switch are all the parts you need to install; mounting nut, knob, and wire twist nuts.






Features:

- Replaces existing push-button switch
- For incandescent, halogen and LED lamps
- Saves energy
- Cool and efficient operation
- Low profile
- No special wiring needed
- Easy to install!
- Maximum power: 60 watts
- 1 year limited warranty
- Engineered and manufactured in the USA

General Specifications:

- Input voltage: 6-15 volts DC
- Temp. range: 0°-70°C
- Size: 0.525" L x 0.535" W x 0.450" H
- Min. Depth required: 0.510"
- Pulse Width Modulated Semiconductor Switch

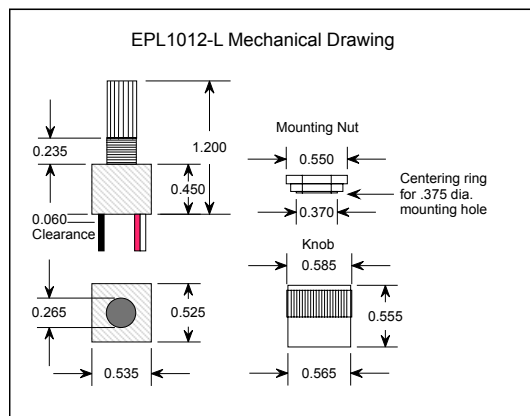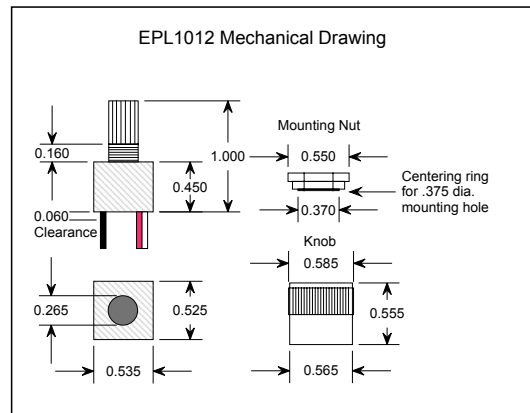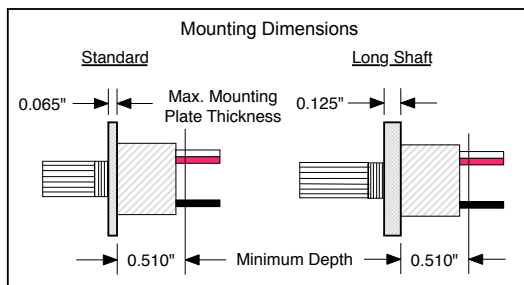

Unless otherwise specified, dimensions are in Inches / mm ± .010 / .25